


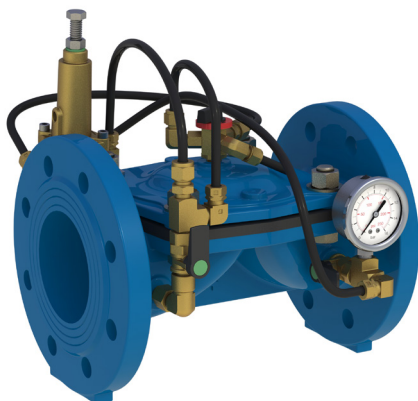

Irrigation

Weir-type Diaphragm, 3-way Pressure Reducing Globe Valve

DOROT S100 PR/M (3W), is a Weir-type Diaphragm, 3-way Automatic Pilot-controlled, Pressure Reducing Globe Valve, with a selector valve for manual override. The valve reduces high upstream pressure to a steady, preset, lower downstream pressure; regardless of fluctuations in upstream pressure or flow rate. In cases where the downstream pressure exceeds the set value, the valve closes drip-tight.

Features and Benefits

Wide range of sizes and patterns	Allows compatibility across different systems for more versatile installation
Flexible reinforced diaphragm design (no bearings, guides, or internal seals)	Significantly reduces maintenance while enhancing reliability; to ensure exceptionally low losses at high flow rates
Low pressure diaphragm mechanism	Enables precise and efficient operation of hydraulic control valves at minimal pressures
Regulates at a stable mode, down to near-zero flow	Ensures consistent performance without the need for specialized low-flow adjustments, such as a V-port or bypass valve
Self-cleaning inline filter	Cuts down on frequency of inspections and maintenance, significantly reducing labor costs
Simple control system design	Facilitates smooth operation, efficient maintenance and precise regulation


Technical Specifications

Size Range		¾" - 24" / DN20 - DN600
Working Pressure		16 bar / 230 psi
Max. Water Temperature		80° C / 176° F
End Connections		Grooved ASME / ANSI AWWA 606
		Threaded BSP / NPT
		Flanged ISO 7005 / ANSI B16.1 / ANSI B16.42 / AS 4087
Construction Materials	Body & Cover	Cast Iron / Ductile Iron / Cast Steel / Stainless Steel / Nickel-Aluminum-Bronze
	Spring	Stainless Steel 302
	Diaphragm	NR / NBR / EPDM / Neoprene
	Coating	Polyester / UV-protected Epoxy
	Fittings & Control Trim Devices	Brass / Stainless Steel 316
	Control Trim Tubes	High Pressure Polypropylene / Copper / Stainless Steel 316


* Other options are available upon request.

Main Control System Components

No.	Component
1	Main Valve
2	Ball Valve
3	Self-flushing Filter
4	3-way Pressure Reducing Pilot Valve
5	Pressure Gauge
6	3-way Position Selector Valve

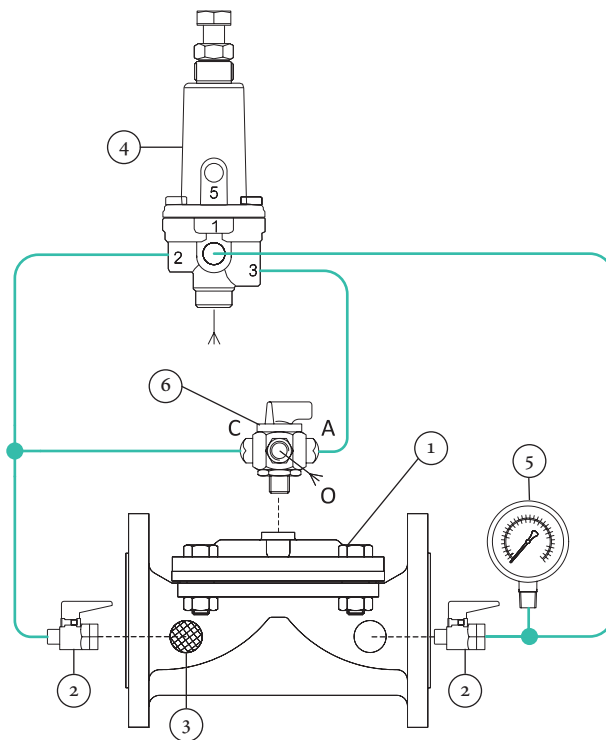

Typical Installation

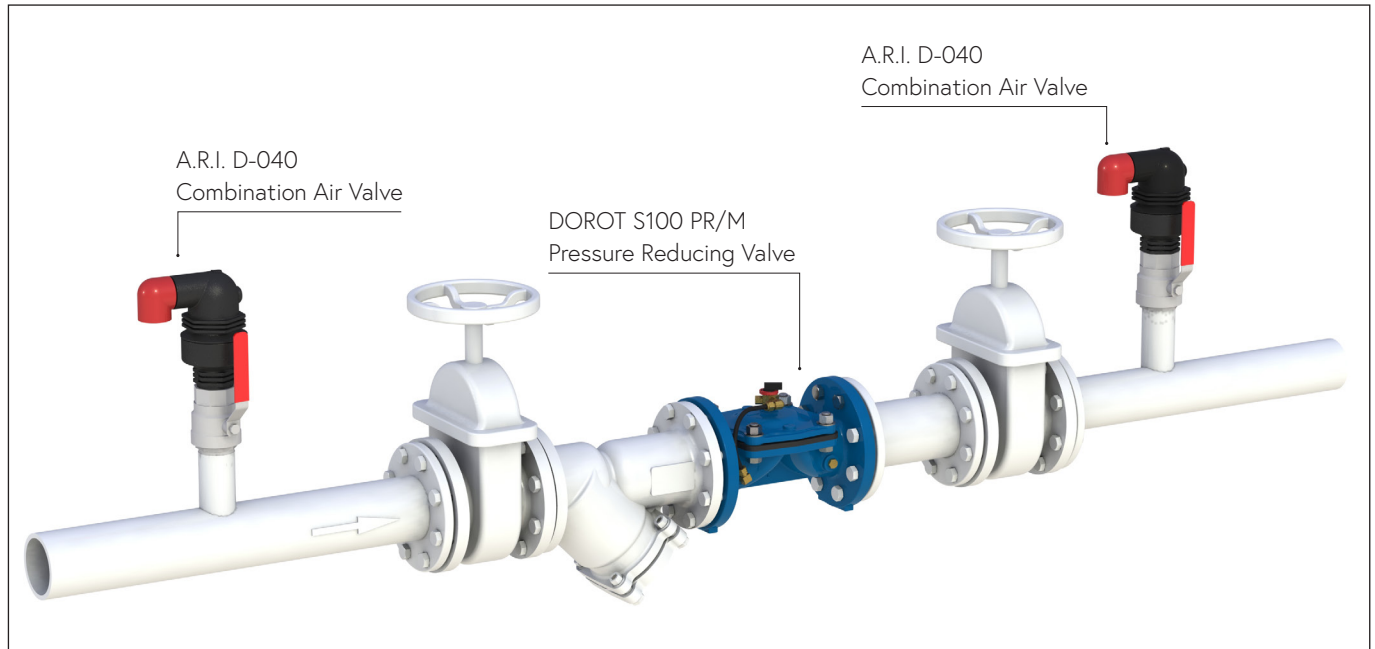

Purchase Specifications

- Hydraulic globe valve with Weir-type diaphragm, pilot-operated.
- No stem, shaft or guide bearing inside the water passage.
- Operated by line pressure or external hydraulic/pneumatic actuation.
- Maintains accurate regulation across the full flow range, without a bypass or throttling plug.
- Controlled by a pressure-reducing pilot valve, to ensure constant outlet pressure, regardless of upstream conditions.

Design Considerations

- Select valve size based on expected maximum flow and acceptable head loss.
- Large pressure differentials may cause cavitation – consult Aquestia for solutions.