



# RCL 28-2UL

## Accessories



General representation



Fire  
Protection

## 2-Way Relay, Manual Reset Latching Device

### Description

A 2-Way, spring-loaded, manual reset latching device, applicable for service on deluge and pre-action valve trims. In its "Ready" position, it prevents draining of the deluge valve's control chamber, keeping the deluge valve closed. Once the deluge valve is actuated, the RCL 28-2UL shifts to its "Latched Open" position, allowing draining of the control chamber and latching open the deluge valve. Manual resetting is accomplished by rotating the RCL 28-2UL's knob.


### Certification & Compliance

UL Listed (when installed on OCV control valves)



### Features & Benefits

- Simple design & maximal dependability
- Extremely large water passages enable fast response
- Tough and durable construction

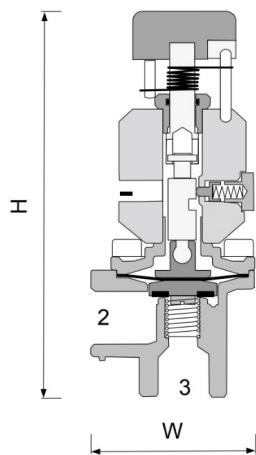

### Operation

General		
Pressure Rating	25 bar / 360psi	
Fluid Temperature	80°C max / 175°F max	
Weight	1.4 kg / 3.1 lbs	
Materials	Standard	
Body	Stainless Steel 316	
Stems	Stainless Steel 316	
Elastomers	EPDM	
Dimensions		
H (Height) max	165 mm / 6 1/2"	
W (Width)	56 mm / 2 1/5"	
Port	Size	Connection
-	1/4" NPT	Pressure Command
2	1/2" NPT	Vent
3	1/2" NPT	Control Chamber

\*Other materials available upon request. Minimum quantities may apply.