

OCV Series 65

Basic Valves

Aquestia
Directing the Flow



General representation



Waterworks

Series 65 Basic Valve

Description

OCV Series 65 control valves are automatic, hydraulically-actuated, diaphragm-operated, rigid seal globe and angle pattern valves. The valves are dependable and hard working; with a simplicity of design that ensures minimal part wear for exceptional performance and longevity. Self-contained, the valves operate automatically off line pressure. When equipped with a variety of pilots, accessories, and materials, the valves perform a wide range of automatic fluid control specifically applicable to municipal water systems, wastewater, irrigation, and industrial systems. The valves consist of three major components: the body, the bonnet, and the internal diaphragm assembly.

Certification & Compliance

UL Water Quality / NSF 61-G & 372



NSF-ISO Quality System (9001)



American-Made: American Recovery & Reinvestment



Factory Mutual Approved



ABS Type Approval



CE (Conformité Européenne) Compliance



Features & Benefits

- Factory tested & certified
- Operates automatically off line pressure
- Quick opening; Non-slam closing operation (when equipped with regulation device)
- Rectangular-shaped, soft seat seal provides drip-tight Class VI closure
- Ductile iron & steel valves are internally & externally epoxy-coated for maximum corrosion protection
- Simple & reliable construction
- Easily maintained without removal from the line
- High-grade construction materials
- Throttling seat retainer for reliable flow & pressure stability
- Optional electric, pneumatic & electro-pneumatic control trims

Operation

Valve Closed:




When line pressure from the valve inlet is applied to the cover chamber, pressurizing the diaphragm, the valve is closed drip-tight.

Valve Open:

When cover chamber pressure is vented, the valve shifts to the fully open position.

Valve Modulating:

The valve is between fully open and closed positions. The valve's control pilot modulates the pressure in the cover chamber, positioning the valve to control the desired pressure or flow. OCV pilot systems provide accurate control in a wide range of performance requirements.

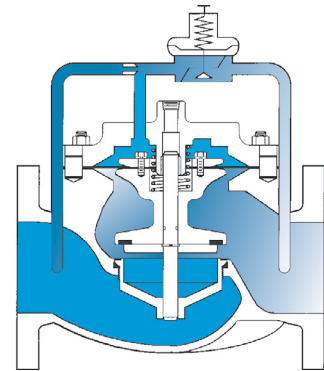

Flow Characteristics

$$DP = sg (Q/C_v \text{ or } K_v)^2$$

where: Q = Flow rate in USGPM (Standard) or Q = Flow rate in cubic meters/sec (Metric)
 C_v = Flow rate in USGPM @ 1 psi pressure drop (Standard) or
 K_v = Flow rate in cubic meters/sec @ 1 bar pressure drop (Metric)
 DP = Pressure drop in psi (Standard) or DP = Pressure drop in bar (Metric)
 sg = Specific gravity of line fluid

Standard		
Valve Size	Globe C_v	Angle C_v
1 1/4"	23	30
1 1/2"	27	35
2"	47	65
2 1/2"	68	87
3"	120	160
4"	200	270
6"	450	550
8"	760	1000
10"	1250	1600
12"	1940	2400
14"	2200	--
16"	2850	4000
24"	6900	--

Metric		
Valve Size	Globe K_v	Angle K_v
DN35	20	26
DN40	23	30
DN50	40 1/2	56
DN65	59	75
DN80	104	138 1/2
DN100	173	233 1/2
DN150	389	476
DN200	657 1/2	865
DN250	299	1384
DN300	1081	2076
DN350	1903	--
DN400	2465	3460
DN600	5968 1/2	--

Resetting, maintenance and periodic testing instructions must be followed as described in detail in the applicable OCV IOM (Installation, Operation & Maintenance) Manual.


Components & Typical Materials

The OCV S65 consists of the following components, arranged as shown on the schematic diagram.

[1] OCV S65 Basic Control Valve:
Hydraulically-operated, diaphragm-actuated globe valve which closes with an elastomer-on-metal seal.


[2] OCV 155L Visual Indicator Assembly (optional):
Provides indication of valve position at a glance.

[3] Drain Port (optional): Water supply drain (3" valve = 1¼" NPTF; 4"-12" valve = 2" NPTF)

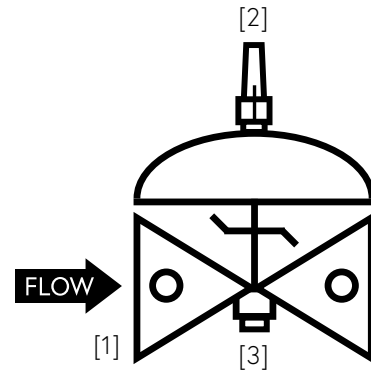

Part	Standard Material	Optional
Valve Body/Bonnet	Ductile Iron	Cast Steel, Stainless Steel, Aluminum
Seat Ring	Stainless Steel	Stainless Steel
Seat Retainer/Diaphragm Plate	Stainless Steel (up to 8"); Ductile Iron (10" & up)	--
Stem	Stainless Steel	Monel
Spring	Stainless Steel	--
Diaphragm	EPDM	Buna-N
Seat Disc	EPDM	Buna-N
Pilot	Stainless Steel	Stainless Steel
Tubing & Fittings	Stainless Steel	Stainless Steel

*Consult Factory for additional available materials.

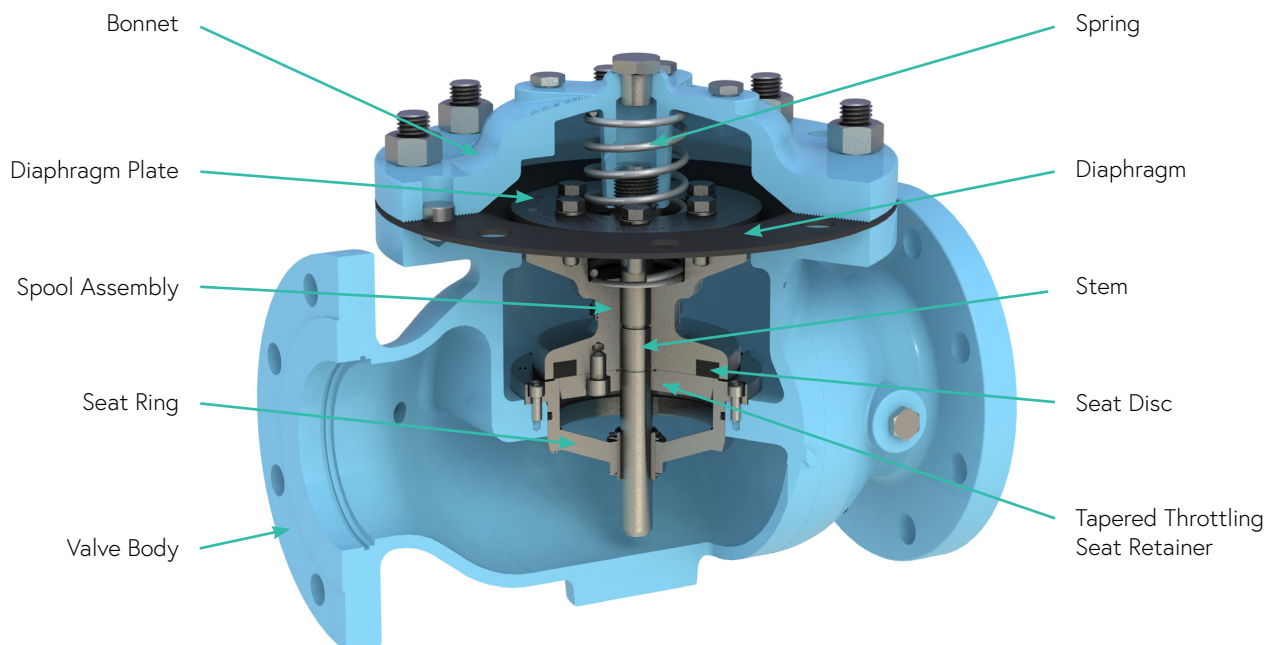


General Arrangement & Dimensions

Standard Sizes													
DIM	End Connections	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"	14"	16"	24"
A	Threaded	8 3/4	9 7/8	10 1/2	13	--	--	--	--	--	--	--	--
	Grooved	8 3/4	9 7/8	10 1/2	13	15 1/4	20	--	--	--	--	--	--
	150# Flanged	8 1/2	9 3/8	10 1/2	12	15	17 3/4	25 3/8	29 3/4	34	39	40 3/8	62
	300# Flanged	8 3/4	9 7/8	11 1/8	12 3/4	15 5/8	18 5/8	26 3/8	31 1/8	35 1/2	40 1/2	42	62 3/4
B	Threaded	1 7/16	1 11/16	1 7/8	2 1/4	--	--	--	--	--	--	--	--
	Grooved	1*	1 3/16	1 7/16	1 3/4	2 1/4	--	--	--	--	--	--	--
	150# Flanged	2 5/16 - 2 1/2	3	3 1/2	3 3/4	4 1/2	5 1/2	6 3/4	8	9 1/2	10 5/8	11 3/4	16
	300# Flanged	2 5/8 - 3 1/16	3 1/4	3 3/4	4 1/8	5	6 1/4	7 1/2	8 3/4	10 1/4	11 1/2	12 3/4	18
C	Threaded	4 3/8	4 3/4	6	6 1/2	--	--	--	--	--	--	--	--
	Grooved	4 3/8*	4 3/4	6	6 1/2	7 5/8	--	--	--	--	--	--	--
	150# Flanged	4 1/4	4 3/4	6	6	7 1/2	10	12 11/16	14 7/8	17	--	20 13/16	--
	300# Flanged	4 3/8	5	6 3/8	6 3/8	7 3/16	10 1/2	13 3/16	15 9/16	17 3/4	--	21 5/8	--
D	Threaded	3 1/8	3 7/8	4	4 1/2	--	--	--	--	--	--	--	--
	Grooved	3 1/8*	3 7/8	4	4 1/2	5 5/8	--	--	--	--	--	--	--
	150# Flanged	3	3 7/8	4	4	5 1/2	6	8	11 3/8	11	--	15 11/16	--
	300# Flanged	3 1/8	4 1/8	4 3/8	4 3/8	5 13/16	6 1/2	8 1/2	12 1/16	11 3/4	--	16 1/2	--
E	All	6	6	7	6 1/2	8	10	11 7/8	15 3/8	17	18	19	27
F	All	3 7/8	3 7/8	3 7/8	3 7/8	3 7/8	3 7/8	6 3/8	6 3/8	6 3/8	6 3/8	6 3/8	8
G	All	6	6 3/4	7 11/16	8 3/4	11 3/4	14	21	24 1/2	28	31 1/4	34 1/2	52
H	All	10	11	11	11	12	13	14	17	18	20	20	28 1/2

Approximate Dimensions. *Grooved end not available in 1 1/4"

Metric Sizes													
DIM	End Connections	DN40	DN50	DN65	DN80	DN100	DN150	DN200	DN250	DN300	DN350	DN400	DN600
A	Threaded	222	251	267	330	--	--	--	--	--	--	--	--
	Grooved	222	251	267	330	387	508	--	--	--	--	--	--
	150# Flanged	216	238	267	305	381	451	645	756	864	991	1026	1575
	300# Flanged	222	251	283	324	397	437	670	791	902	1029	1067	1619
B	Threaded	37	43	48	57	--	--	--	--	--	--	--	--
	Grooved	25*	30	37	44	57	--	--	--	--	--	--	--
	150# Flanged	59-64	76	89	95	114	140	171	203	241	270	298	406
	300# Flanged	67-78	83	95	105	127	159	191	222	260	292	324	457
C	Threaded	111	121	152	165	--	--	--	--	--	--	--	--
	Grooved	111*	121	152	165	194	--	--	--	--	--	--	--
	150# Flanged	108	121	152	152	191	254	322	378	432	--	529	--
	300# Flanged	111	127	162	162	198	267	335	395	451	--	549	--
D	Threaded	79	98	114	114	--	--	--	--	--	--	--	--
	Grooved	79*	98	114	114	143	--	--	--	--	--	--	--
	150# Flanged	76	98	102	102	140	152	203	289	279	--	398	--
	300# Flanged	79	105	111	111	148	165	216	306	298	--	419	--
E	All	152	152	178	165	203	254	302	391	432	457	483	686
F	All	98	98	98	98	98	98	162	162	162	162	162	203
G	All	152	171	222	222	298	356	533	711	794	794	876	1321
H	All	254	279	279	279	305	330	356	457	508	508	508	724

Approximate Dimensions. *Grooved end not available in 1/4"

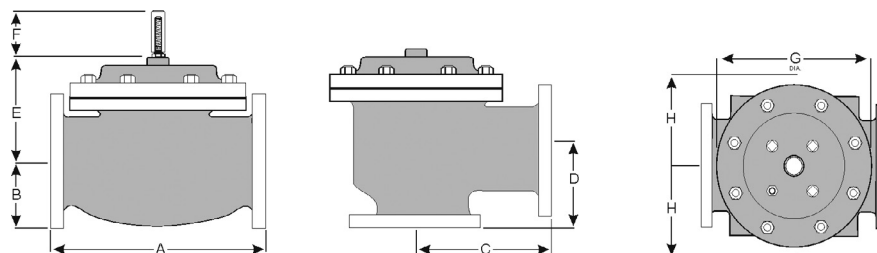

Specifications

VALVE BODY & BONNET	Ductile Iron		Cast Steel		Stainless Steel	
Material Specification	ASTM A536/65-45-12		ASTM A216/WCB		ALL GRADES	
END CONNECTIONS						
Flange Standard (also available in metric)	ANSI B16.42		ANSI B16.5		ANSI B16.5	
Flange Class	150#	300#	150#	300#	150#	300#
Flange Face	Flat	Raised	Raised	Raised	Raised	Raised
Maximum Working Pressure	250psi	640psi	285psi	740psi	285psi	740psi
Threaded Working Pressure: ANSI B1.20.1 640psi			Grooved End Working Pressure: 300psi			
INTERNALS						
Stem	Stainless Steel					
Spring	Stainless Steel					
Spool	Ductile Iron (epoxy coated) / Optional - Stainless Steel				Stainless Steel	
Seat Disc Retainer	Ductile Iron (epoxy coated) (10" & Larger)				Stainless Steel	
	Stainless Steel (8" & Smaller / Optional - All Sizes)					
Diaphragm Plate	Ductile Iron (epoxy coated) / Optional - Stainless Steel				Stainless Steel	
Seat Ring Trim	Stainless Steel / Optional - Low-Lead Bronze				Stainless Steel	
Upper Stem Bushing	Bronze or PTFE				PTFE	
Lower Stem Bushing	Not applicable for Low-Lead Bronze Seat Rings / PTFE for Stainless Steel Seat Rings					
ELASTOMER PARTS (Rubber)						
Diaphragm/Seat Disc/O-Rings	EPDM / Optional Buna-N					
Operating Temperature*	32°F to 230°F Max					
COATINGS	NSF-61 Epoxy Coating					
ELECTRICAL SOLENOIDS						
Body	Brass / Stainless Steel					
Enclosures	Water Tight, NEMA 1, 3 , 4, 4X					
Power	AC, 60HZ - 120, 240, 480 Volts	AC, 50HZ - In 110 Volt Multiples	DC, 6, 12, 24, 240 Volts			
Operation	Energize to Open		De-Energize to Open			
CONTROL PILOTS						
Body	Low-Lead Bronze / Stainless Steel					
Internal	Stainless Steel					
TUBING	Stainless Steel / Copper					
FITTINGS	Low-Lead Brass / Stainless Steel					

*Consult Factory when temperatures approach low or high temperature allowance. Consult Factory for additional available materials.



Globe Flanged Sizes

1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"	14"	16"	18"	20"	24"
32mm	40mm	50mm	65mm	80mm	100mm	150mm	200mm	250mm	300mm	350mm	400mm	450mm*	500mm*	600mm

* Consult factory



Angle Flanged Sizes

1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"	16"
32mm	40mm	50mm	65mm	80mm	100mm	150mm	200mm	250mm	300mm	400mm



Globe/Threaded Sizes

1 1/4"	1 1/2"	2"	2 1/2"	3"
32mm	40mm	50mm	65mm	80mm



Globe/Angle Grooved Sizes

1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	6"
32mm	40mm	50mm	65mm	80mm	100mm	150mm*

Technical Data

Temperature (Elastomers)	
Water	up to 110°C / 230°F max
Sizes	
Globe	1 1/4" - 24" / 32-600mm
Angle	1 1/4" - 16" / 32-400mm
Pressure Rating (Ductile Iron at 100°F/37.8°C)	
250 psi for ISO Class 150# & 640 psi for Class 300#	
End Connections	
Flanged	ISO-PN16 & ISO-PN25
	ASME/ANSI B16.42 & B16.5 Class 150# & 300#
	Additional options available upon request
Threaded	BSP/NPT
Grooved	ASME/ANSI AWWA 606
Elastomers	
EPDM	Buna-N
Coating Material	
NSF 61 Epoxy Coating	High Built, Fusion Bonded Apoxy
Main Valve Trim Material	
Stainless Steel	

Body & Cover Material	
Ductile Iron ASTM A536	Stainless Steel ASTM CF8M
Cast Steel ASTM A216	Aluminum
Trim Material	
Stainless Steel	
Optional Components	
Pressure Switch	Open/Close Speed Control
Limit Switch	Pressure Gauges
Drain Plug	Visual Position Indicator
Isolation Ball Valves	
Items to Specify	
Electrical features other than standard (24VDC, IP65/NEMA4)	
If explosion proof accessories are required such as solenoids, pressure switches, etc., please define classification	
Control trim material other than standard	
Required standards, certifications and approvals	