



Model 108-4



Pressure Relief/Sustaining Valves



General representation



Waterworks

Pressure Relief/Sustaining/Solenoid Shut-Off Valve

Description

OCV 108-4, a pressure relief/sustaining valve, prevents main line pressure from exceeding a predetermined maximum and prevents the upstream pressure from falling below a predetermined minimum. The valve shall be equipped with a 2-way solenoid valve that will allow the valve to open when energized/deenergized. The valve is applicable anywhere a system must be protected from pressures that are too high (relief) or too low (sustaining), combined with a need for on/off electrical operation.

Features & Benefits

- Limits inlet pressure by relieving excess pressure
- Prevents inlet pressure from dropping below a predetermined minimum
- Electrically-operated solenoid allows valve to open (control pressure) or shut off (close)
- Operates over a wide flow range
- Inlet pressure is adjustable with single screw
- Quick opening & adjustable closing speed
- Can be maintained without removal from the line
- Factory tested and can be preset to your requirements

Typical Applications

Irrigation Systems

Municipal Distribution Systems

Pump Systems



Certification & Compliance

UL Water Quality / NSF 61-G & 372

NSF-ISO Quality System (9001)

American-Made: American Recovery & Reinvestment

Factory Mutual Approved

ABS Type Approval

CE (Conformité Européenne) Compliance



Industrial Plants

Data Centers

Commercial Plumbing



Operation


When closed, a 2-way solenoid causes the main valve to close. Opening the solenoid opens the valve and allows the normally closed, spring-loaded pilot to sense upstream pressure and respond to changes in pressure levels, causing the main valve to do the same. The net result is a constant modulating action of the pilot and main valve to hold the upstream pressure constant. The pilot system is equipped with a closing speed control that fine tunes the valve's response to the system variables.

The solenoid can be supplied normally closed (energize to enable) or normally open (energize to close).

Components

The OCV 108-4 consists of the following components, arranged as shown on the schematic diagram:

- 1 OCV S65 Basic Control Valve
- 2 OCV 1330 Pressure Relief Pilot
- 3 OCV 451 2-Way Solenoid Pilot
- 4 OCV 126 Ejector - Fixed orifice pilot system supply restrictor
- 5 OCV 141-3 Flow Control Valve (Closing Speed Control)
- 6 OCV 159 Y-Type Strainer - Protects pilot system from dirt/debris
- 7 OCV 141-4 Isolation Ball Valves
- 8 OCV 155 Visual Indicator (Optional)

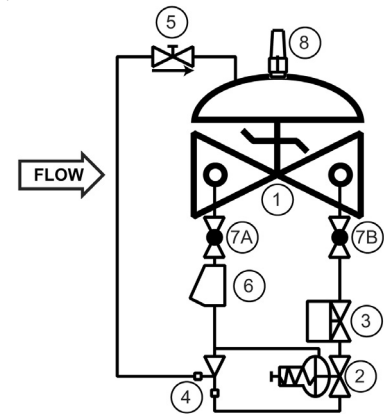

Pressure Table

End Connections	Ductile Iron	Steel/SST	Low-Lead Bronze
Standard (Maximum Working Pressures at 100°F)			
Threaded	640 psi	640 psi	500 psi
Grooved	300 psi	300 psi	300 psi
150# Flanged	250 psi	285 psi	225 psi
300# Flanged	640 psi	740 psi	500 psi

Based on ANSI flange ratings.

Flow Characteristics

$DP = sg (Q/C_v \text{ or } K_v)^2$ where: Q = Flow rate in USGPM (Standard) or Q = Flow rate in cubic meters/sec (Metric)
 C_v = Flow rate in USGPM @ 1 psi pressure drop (Standard) or
 K_v = Flow rate in cubic meters/sec @ 1 bar pressure drop (Metric)
 DP = Pressure drop in psi (Standard) or DP = Pressure drop in bar (Metric)
 sg = Specific gravity of line fluid

Standard		
Valve Size	Globe C_v	Angle C_v
1 1/4"	23	30
1 1/2"	27	35
2"	47	65
2 1/2"	68	87
3"	120	160
4"	200	270
6"	450	550
8"	760	1000
10"	1250	1600
12"	1940	2400
14"	2200	--
16"	2850	4000
24"	6900	--

Metric		
Valve Size	Globe K_v	Angle K_v
DN35	20	26
DN40	23	30
DN50	40 1/2	56
DN65	59	75
DN80	104	138 1/2
DN100	173	233 1/2
DN150	389	476
DN200	657 1/2	865
DN250	299	1384
DN300	1081	2076
DN350	1903	--
DN400	2465	3460
DN600	5968 1/2	--

Resetting, maintenance and periodic testing instructions must be followed as described in detail in the applicable OCV IOM (Installation, Operation & Maintenance) Manual.

Typical Materials

Part	Standard Material	Optional
Valve Body/Bonnet	Ductile Iron	Cast Steel, Stainless Steel, Aluminum
Seat Ring	Stainless Steel	Stainless Steel
Seat Retainer/Diaphragm Plate	Stainless Steel (up to 8"); Ductile Iron (10" & up)	--
Stem	Stainless Steel	Monel
Spring	Stainless Steel	--
Diaphragm	EPDM	Buna-N
Seat Disc	EPDM	Buna-N
Pilot	Stainless Steel	Stainless Steel
Tubing & Fittings	Stainless Steel	Stainless Steel

*Consult Factory for additional available materials.


General Arrangement & Dimensions

Standard Sizes													
DIM	End Connections	1 1/2"	2"	2 1/2"	3"	4"	6"	8"	10"	12"	14"	16"	24"
A	Threaded	8 3/4	9 7/8	10 1/2	13	--	--	--	--	--	--	--	--
	Grooved	8 3/4	9 7/8	10 1/2	13	15 1/4	20	--	--	--	--	--	--
	150# Flanged	8 1/2	9 3/8	10 1/2	12	15	17 3/4	25 3/8	29 3/4	34	39	40 3/8	62
	300# Flanged	8 3/4	9 7/8	11 1/8	12 3/4	15 5/8	18 5/8	26 3/8	31 1/8	35 1/2	40 1/2	42	62 3/4
B	Threaded	1 7/16	1 11/16	1 7/8	2 1/4	--	--	--	--	--	--	--	--
	Grooved	1*	1 3/16	1 7/16	1 3/4	2 1/4	--	--	--	--	--	--	--
	150# Flanged	2 5/16 - 2 1/2	3	3 1/2	3 3/4	4 1/2	5 1/2	6 3/4	8	9 1/2	10 5/8	11 3/4	16
	300# Flanged	2 5/8 - 3 1/16	3 1/4	3 3/4	4 1/8	5	6 1/4	7 1/2	8 3/4	10 1/4	11 1/2	12 3/4	18
C	Threaded	4 3/8	4 3/4	6	6 1/2	--	--	--	--	--	--	--	--
	Grooved	4 3/8*	4 3/4	6	6 1/2	7 5/8	--	--	--	--	--	--	--
	150# Flanged	4 1/4	4 3/4	6	6	7 1/2	10	12 11/16	14 7/8	17	--	20 13/16	--
	300# Flanged	4 3/8	5	6 3/8	6 3/8	7 3/16	10 1/2	13 3/16	15 9/16	17 3/4	--	21 5/8	--
D	Threaded	3 1/8	3 7/8	4	4 1/2	--	--	--	--	--	--	--	--
	Grooved	3 1/8*	3 7/8	4	4 1/2	5 5/8	--	--	--	--	--	--	--
	150# Flanged	3	3 7/8	4	4	5 1/2	6	8	11 3/8	11	--	15 11/16	--
	300# Flanged	3 1/8	4 1/8	4 3/8	4 3/8	5 13/16	6 1/2	8 1/2	12 1/16	11 3/4	--	16 1/2	--
E	All	6	6	7	6 1/2	8	10	11 7/8	15 3/8	17	18	19	27
F	All	3 7/8	3 7/8	3 7/8	3 7/8	3 7/8	3 7/8	6 3/8	6 3/8	6 3/8	6 3/8	6 3/8	8
G	All	6	6 3/4	7 11/16	8 3/4	11 3/4	14	21	24 1/2	28	31 1/4	34 1/2	52
H	All	10	11	11	11	12	13	14	17	18	20	20	28 1/2

Approximate Dimensions. *Grooved end not available in 1/4"

Metric Sizes													
DIM	End Connections	DN40	DN50	DN65	DN80	DN100	DN150	DN200	DN250	DN300	DN350	DN400	DN600
A	Threaded	222	251	267	330	--	--	--	--	--	--	--	--
	Grooved	222	251	267	330	387	508	--	--	--	--	--	--
	150# Flanged	216	238	267	305	381	451	645	756	864	991	1026	1575
	300# Flanged	222	251	283	324	397	437	670	791	902	1029	1067	1619
B	Threaded	37	43	48	57	--	--	--	--	--	--	--	--
	Grooved	25*	30	37	44	57	--	--	--	--	--	--	--
	150# Flanged	59-64	76	89	95	114	140	171	203	241	270	298	406
	300# Flanged	67-78	83	95	105	127	159	191	222	260	292	324	457
C	Threaded	111	121	152	165	--	--	--	--	--	--	--	--
	Grooved	111*	121	152	165	194	--	--	--	--	--	--	--
	150# Flanged	108	121	152	152	191	254	322	378	432	--	529	--
	300# Flanged	111	127	162	162	198	267	335	395	451	--	549	--
D	Threaded	79	98	114	114	--	--	--	--	--	--	--	--
	Grooved	79*	98	114	114	143	--	--	--	--	--	--	--
	150# Flanged	76	98	102	102	140	152	203	289	279	--	398	--
	300# Flanged	79	105	111	111	148	165	216	306	298	--	419	--
E	All	152	152	178	165	203	254	302	391	432	457	483	686
F	All	98	98	98	98	98	98	162	162	162	162	162	203
G	All	152	171	222	222	298	356	533	711	794	794	876	1321
H	All	254	279	279	279	305	330	356	457	508	508	508	724

Approximate Dimensions. *Grooved end not available in 1/4"

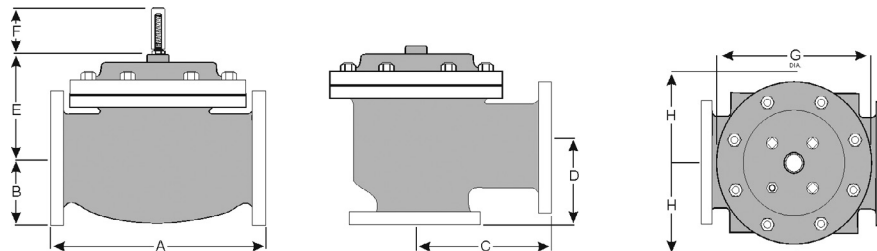

Technical Data

Temperature (Elastomers)	
Water	up to 110°C / 230°F max
Sizes	
Globe	1 1/4" - 24" / 32-600mm
Angle	1 1/4" - 16" / 32-400mm
Pressure Rating (Ductile Iron at 100°F/37.8°C)	
250 psi for ASME Class 150# & 640 psi for Class 300#	
End Connections	
Flanged	ISO-PN16 & ISO-PN25
	ASME/ANSI B16.42 & B16.5 Class 150# & 300#
	Additional options available upon request
Threaded	BSP/NPT
Grooved	ASME/ANSI AWWA 606
Elastomers	
EPDM	Buna-N
Coating Material	
NSF 61 Epoxy Coating	High Built, Fusion Bonded Apoxy
Main Valve Trim Material	
Stainless Steel	

Body & Cover Material	
Ductile Iron ASTM A536	Stainless Steel ASTM CF8M
Cast Steel ASTM A216	Aluminum
Trim Material	
Stainless Steel	
Optional Components	
Pressure Switch	Open/Close Speed Control
Limit Switch	Pressure Gauges
Drain Plug	Visual Position Indicator
Items to Specify	
Electrical features other than standard (24VDC, IP65/NEMA4)	
If explosion proof accessories are required such as solenoids, pressure switches, etc., please define classification	
Control trim material other than standard	
Required standards, certifications and approvals	

Engineering Specifications

The pressure relief/sustaining valve shall be a single-seated, line pressure operated, diaphragm actuated, pilot controlled valve. The valve shall seal by means of a corrosion-resistant seat and a resilient, rectangular seat disc. These, and other parts, shall be replaceable without removing the valve from the line. The stem of the main valve shall be guided top and bottom by integral bushings. Alignment of the body, bonnet and diaphragm assembly shall be by precision dowel pins. The diaphragm shall not be used as a seating surface, nor shall the pistons be used as an operating means. The pilot system shall be furnished complete and installed on the main valve. It shall include a closing speed control, Y-Type strainer, solenoid valve, and isolation ball valves. The pressure relief/sustaining valve shall

be operationally and hydrostatically tested prior to shipment. The main valve body and bonnet shall be ductile iron. All ferrous surfaces shall be coated with 4 mils of epoxy. The main valve seat ring shall be low-lead bronze. Elastomers (diaphragms, resilient seats and o-rings) shall be EPDM. The control pilots, opening speed control, isolation ball valves, and control line tubing shall be stainless steel. The solenoid valve shall have a stainless steel body, weatherproof enclosure, and be suitable for operation on <X> voltage. The pressure relief/sustaining valve shall be suitable for controlling the inlet pressure to a <X to X> of <X> psi at flow rates ranging from <X to X> gpm. The pressure relief/sustaining valve shall be an OCV 108-4, as manufactured by OCV, Tulsa, OK, USA.